

openAir neo is a high-performance single channel ADS-B receiver with integrated battery buffered GPS module.

The solution offers excellent surveillance accuracy, update rate and identification information at lower cost compared to traditional surveillance systems. The device embeds a powerful multi-core processor that allows running multiple ASTERIX processors, a web-based CMS application and custom applications on request.


Messages are timestamped by a high-precision GPS synchronized timestamp to detect duplicate messages received from the multiple receiver stations and enabling use as in a multilateration network.

openAir1090 neo offers:

- Surveillance coverage in non-radar airspace
- Scalability from a single sensor system to a multi-sensor distributed MLAT system
- Easy data exchange with other systems (ASTERIX, JSON, RAW formats)
- Advanced decoding techniques, CRC correction, best-in-class decoding of overlapping signal frames
- High dynamic receiver for monitoring of en-route, terminal area and surface movement at the same time
- Compact and high reliability, no moving parts
- Configured to be used as stratum-1 NTP server
- Embedded band-pass filter to allow good performance in difficult RF environment
- Decoding according DO260/A/B, ED-129B compliant
- 110-240VAC, 5VDC, PoE power options
- Direct data feed for AVIONIX traffic situation display **tsd**, traffic analysis tool **tda** and traffic data monitor **tdm**
- Receiver can be configured to be used for UAT on 978MHz and FLARM/OGN on 868MHz
- Option to run AVIONIX FlightLog function to record AOBT, ATOT, ALDT, AIBT when installed at an airport



System Overview

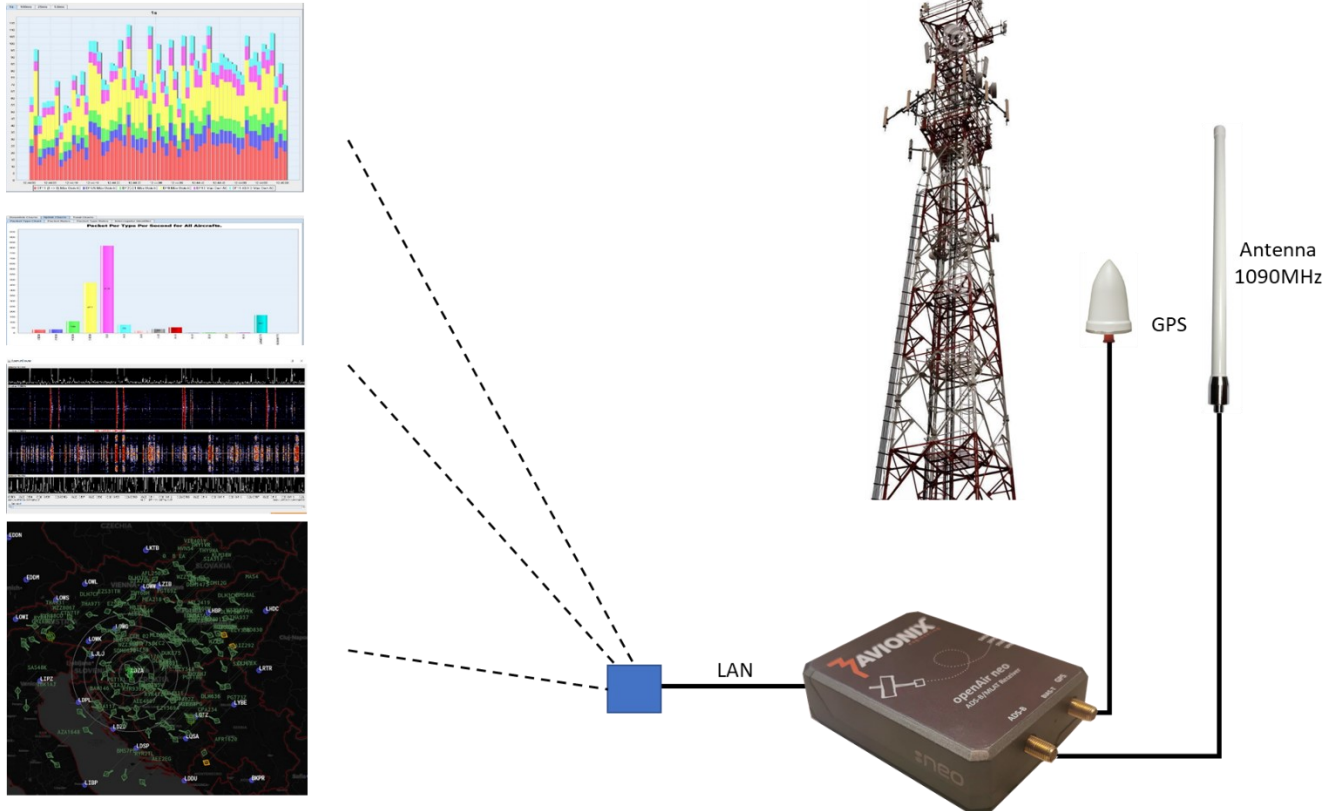

Front Panel



Item	Description
ADS-B input	1090 MHz antenna connector (SMA female)
GPS input	GPS antenna connector (SMA female)
BIAS-T LED	Lighting green when BIAS-T is activated

Rear Panel



Item	Description
LAN	1Gbit Ethernet LAN port
USB x 4	USB ports to connect mouse, keyboard, external storage device or TFT display

Side Panel



Item	Description
USB-C	DC-5V power input
HDMI	HDMI port to connect monitor
Audio	Audio input/output
LEDs	VPN (blue), STAT (green), 1PPS (yellow), DATA (red)

AUX Display

With every receiver a small TFT display is supplied that can be plugged to one of the USB ports. The display provides information about the assigned IP address and the reception status on GPS and the 1090 MHz frequency.



Technical Parameters

Power supply		
Input voltage	5 VDC/3A	
Power consumption (average)	5	[W]
Dimensions		
Type of enclosure	Desktop enclosure	
Width	70	[mm]
Height	30	[mm]
Enclosure dimensions (w * h * l)	70 * 30 * 95	[mm]
Weight	240	[g]
1090MHz Receiver Input		
Frequency	1090	[MHz]
Antenna Input	50	[Ω] SMA female
Sensitivity and dynamic range	-95 to 0	dBm
Processing	>2000 MODE-S	Msg/sec
BIAS-T for external LNA	Configurable, 5V/200mA	
GPS receiver		
Receiver type	72-channel u-blox M8 engine	
GNSS	GPS/QZSS, GLONASS, BeiDou, Galileo	
Antenna/power supply	Active antenna 3.3VDC	SMA female
Timing accuracy	≤ 20 ns	GNSS locked
Network connection		
Ethernet type	Cat. 5e, 10/100/1000BaseTX	RJ45 connector
Surge protection	8kV IEC 61000-4-2	
Data protocols	TCP/IP, UDP/IP, HTTP	
Wifi	2.4G, 5G, 802.11 b/g/n/ac	integrated antenna
IP address	Fixed or DHCP	
Environmental specification		
Ambient temperature	0 to 40	[°C]
Relative humidity	<80	[%]

For information or demonstration please contact:
 AVIONIX ENGINEERING sp. z o. o.
 ul. Sobieskiego 1/5
 31-136 Kraków, Poland
 info@avionix.pl